

DOMINO XT 48

DOMINO XT 96

Memory Lighting Control Desk 48 to 96 Channels

Preliminary Data Sheet



Description

- 48 faders in 2-preset mode or 96 faders in extended mode on DOMINO XT 96 - 24/48 faders on DOMINO XT 48.
- 48 faders configurable as channels, submasters or playbacks on DOMINO XT 96 - 24 faders on DOMINO XT 48.
- Theatrical dipless crossfade with 2 general masters, stage and preset, and dedicated buttons.
- Minimum of 500 theatrical memories to easily create and modify theatrical playbacks.
- Individual In (Up) and Out (Down) fade times for each memory and for each submaster.
- Up to 594 submasters on the DOMINO XT 96 – 378 on the DOMINO XT 48.
- Up to 594 chasers on the DOMINO XT 96 – 378 on the DOMINO XT 48; Up to 250 steps of a Chaser can be recorded as Channels, Memory or Snapshot of the output.
- Flash/Assign pushbuttons with LED for each of the 96 faders on the DOMINO XT 96 – 48 on the DOMINO XT 48.
- Up to 66 submasters on DOMINO XT 96 can be played simultaneously – 43 on the DOMINO XT 48.
- LED display showing status information via scrolling messages.
- 1 SVGA output for displaying memories, patch, texts and help menus in multiple languages.
- 1 USB connector for show recording and software update.
- MIDI IN/OUT connector for Midi functionality.
- Moving light control module, for controlling up to 128 moving lights, on DOMINO XT 48 M & XT 96 M as standard, and on DOMINO XT 48 & XT 96 as retrofit option:
 - Powerful effects engine and automatic fanning of fixtures.
 - Extensive fixture library with Web updates.
 - Comprehensive controls for filters, pallets, presets, cloning, groups, storing, lock home, etc.
 - 6 touch pad displays (virtual wheels) for parameter control.
 - DOMINO XT 48 M: 36 groups, 96 presets, 96 pallets and 378 effects.
 - DOMINO XT 96 M: 36 groups, 192 presets, 192 pallets and 594 effects.
- 2 Physical DMX512/1990 output on XLR-5F connector.
- Fully proportional patch to 1024 dimmers.

References

- DOMINO XT 48** – 48 channels, 1024 DMX channel console, 1 SVGA output
- DOMINO XT 48 M** – 48 channels, 1024 DMX channel console, 1 SVGA output + Motion control module
- DOMINO XT 96** – 96 channels, 1024 DMX channel console, 1 SVGA output
- DOMINO XT 96 M** – 96 channels, 1024 DMX channel console, 1 SVGA output + Motion control module

Supplied with :

- power supply cable with CEE 7-7 plug

Options

- Moving light control module, for controlling up to 128 moving lights for retrofitting on DOMINO XT 48 & XT 96.
- USB Stick
- Gooseneck light
- Dust Cover DOMINO 24
- Dust Cover DOMINO 48
- Flight Case DOMINO 24
- Flight Case DOMINO 48
- 17" LCD/TFT monitor

DOMINO XT MC

**FLASHMEM
WORKLITE/XLR3
DC/DOM24
DC/DOM48
FLY/DOM24
FLY/DOM48
LCD/TFT**

Characteristics

Power requirements: 90-260 V, 47/63Hz power supply with automatic detection.

Dimensions


DOMINO XT 48
(Width x Depth x Height): 735 x 535 x 135 mm
Net weight: 15.5 kg

DOMINO XT 96
(Width x Depth x Height): 975 x 535 x 135 mm
Net weight: 26.0 kg

DOMINO XT 48


DOMINO XT 96

Front display layout

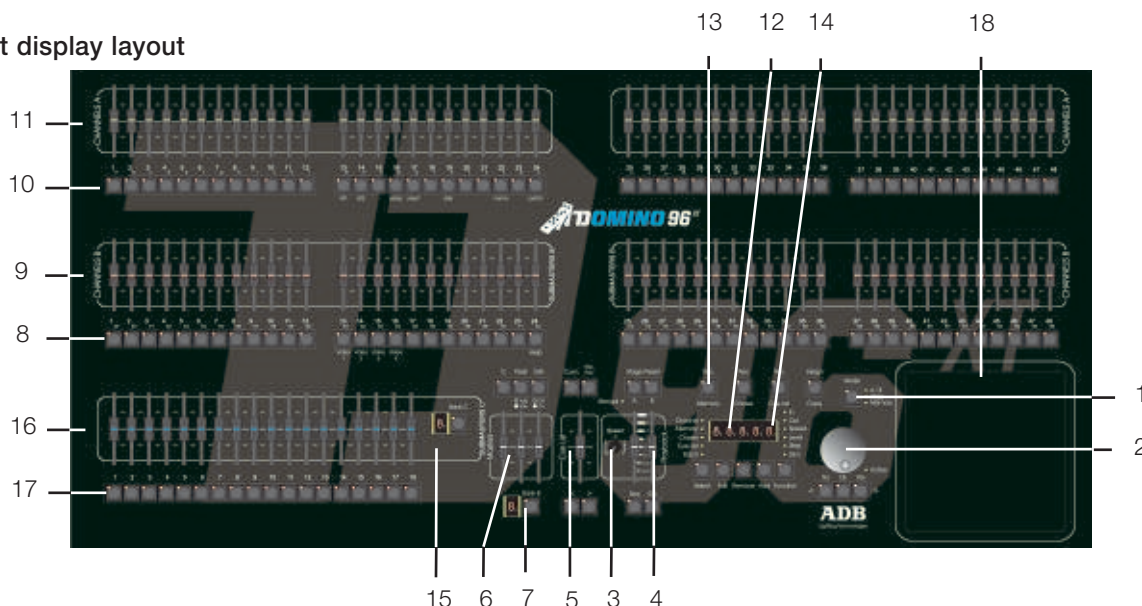

- | | |
|--|--------------------------------|
| 1 Mode button – A/B, Wide & Memory modes | 10 Flash bank A buttons |
| 2 Wheel for editor | 11 Channel bank A faders |
| 3 Speed control rotating fader | 12 Editor buttons |
| 4 Theatrical dipless crossfade with 2 faders, stage and preset masters and dedicated buttons | 13 Record buttons |
| 5 Cue list fader | 14 On board LED display |
| 6 Master faders | 15 Bank C button |
| 7 Bank B button | 16 Submaster bank C faders |
| 8 Flash bank B buttons | 17 Flash bank C buttons |
| 9 Submaster bank B faders | 18 Moving light control module |

Connector Layout

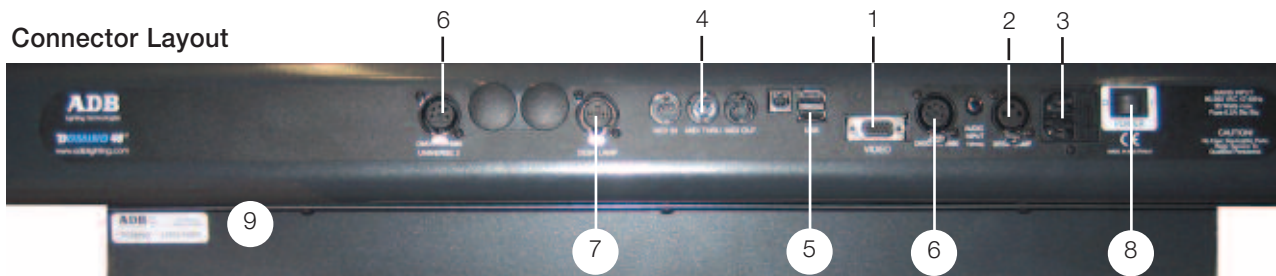

- | | |
|--|--|
| 1. Video Output: mini DB 15 female connector for video output. | 4. Midi (IN, THRU, OUT): 3 DIN 5 sockets (5 female contacts) following MIDI standard. |
| 2. Audio Input: RCA (phono) type socket to accept an audio signal. The audio signal should have a nominal level of 1 volt RMS (line level). | 5. USB: 1 USB in and 2 USB out sockets following USB standard. |
| 3. Mains Input: standard power supply connector type IEC320 - C14. Mains Input socket is fused with a M205 sized 500mA fuse | 6. DMX: 2 x DMX512/1990 output connector (5 pin female XLR connector) following DMX 512 standard. |
| | 7. Desk Lamp: XL3 output connector (3 pin female XLR connector) – 12 VDC |
| | 8. Power Switch |
| | 9. Product identity plate
Product name and serial number. |

This equipment complies with all applicable European directives and carries a CE mark.

ADB - Your Partner for Light

Belgium	N.V. ADB-TTV Technologies S.A. (Group Headquarters) Leuvensesteenweg 585, B-1930 Zaventem Tel : 32.2.709.32.11, Fax : 32.2.709.32.80, E-Mail : adb@adblighting.com
Deutschland	ADB GmbH Boschstrasse 3, D-61239 Ober-Mörlen Tel : 49.6002.93.933.0, Fax : 49.6002.93.933.33, E-Mail : info@adblighting.de
France	ADB S.A.S. Sales Office: 168/170, boulevard Camélinat F-92240 Malakoff Tel : 33.1.41.17.48.50, Fax : 33.1.42.53.54.76, E-Mail : adb.fr@adblighting.com Factory & Group Logistics Centre: Zone industrielle Rouvroy F-02100 Saint-Quentin Tel : 33.3.23.06.35.70, Fax : 33.3.23.67.66.56, E-Mail : adb.fr@adblighting.com

ADB
Lighting Technologies

DS-1183-E-0111 Subject to modifications